

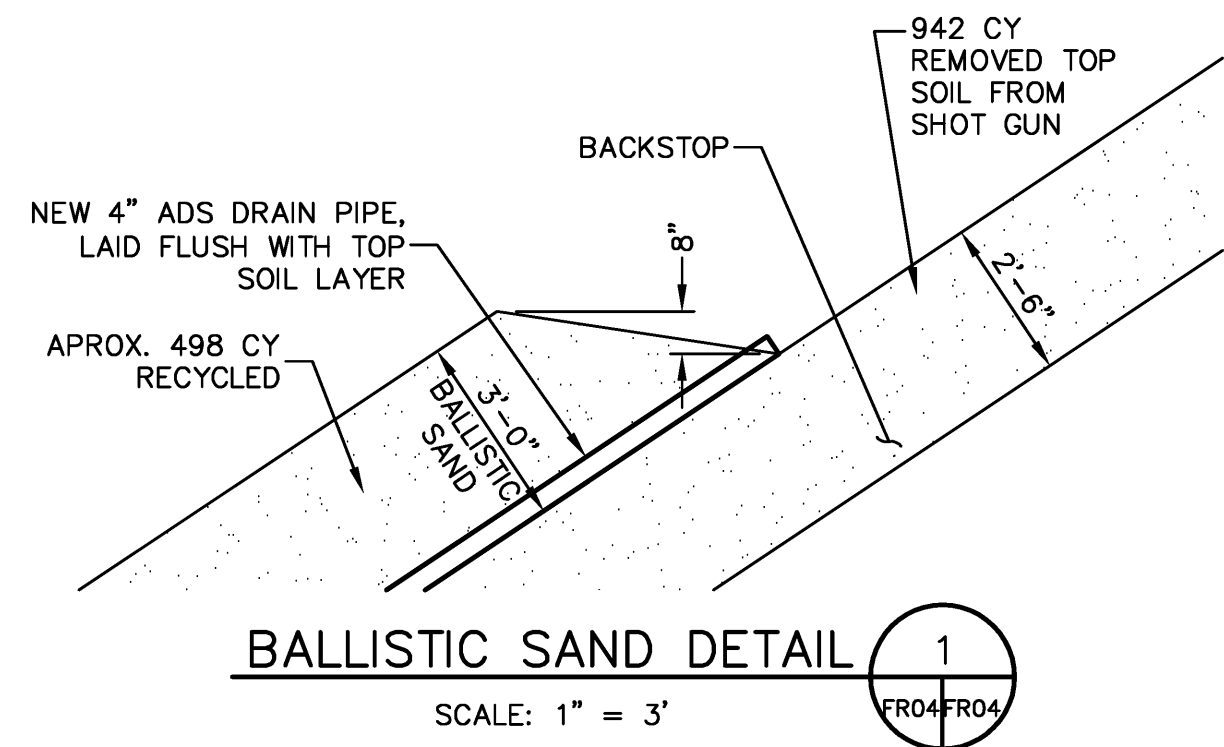


TYPICAL BACKSTOP SECTION C
SCALE: 1" = 10'

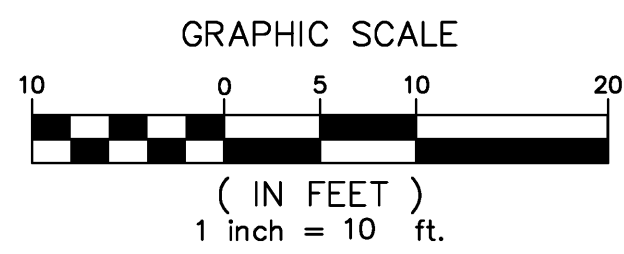

NOTES:

1. BALLISTIC SAND SHALL BE THE RECYCLED TOP SOIL REMOVED FROM SKEET SHOTL FALL AREA AMMENDED WITH ECOBOND.
2. USE BALANCE OF 2.5" RECYCLED MATERIAL TO COMPLETE THE FRONT OF THE BACKSTOP AS SHOWN.
3. SLOPES SHALL BE STABILIZED BY SOLID SODDINGS.
4. COMPACT BERM BASE FOUNDATION TO 95% LABORATORY DRY DENSITY. DEPTH OF FOUNDATION SHALL BE DETERMINED BY SITE CONDITIONS.
5. BACKSTOP HEIGHT IS 20'.



CLARK/DIXON
ARCHITECTS


2035 MADISON AVENUE / MEMPHIS, TN 38104
clerkdixonarchitects.com

SHELBY COUNTY SHERIFF'S OFFICE

RANGE OPERATIONS BUILDING

800 DOVECREST MEMPHIS, TENNESSEE

SEAL

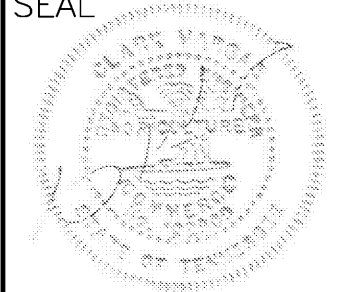

REVISIONS:

DATE:
AUGUST 24, 2012

DRAWN BY:
DM

SHEET TITLE:

TYPICAL
SECTIONS

SHEET NO:

FR04