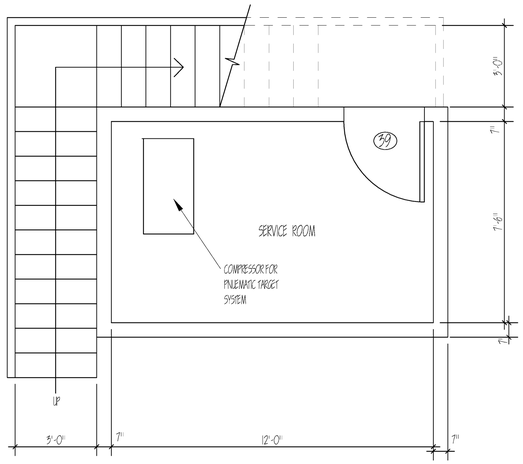


## LOWER FLOOR PLAN

SCALE: 3/8" = 1'-0"

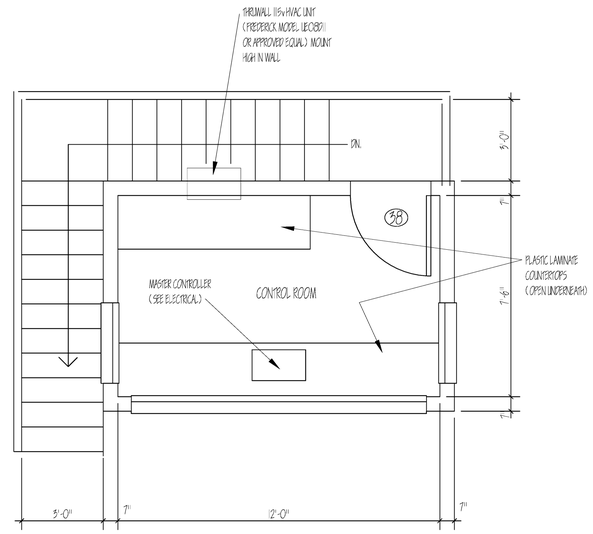


## UPPER FLOOR PLAN

SCALE: 3/8" = 1'-0"

## CONSTRUCTION NOTES:

REFER TO STRUCTURAL DRAWINGS FOR CONCRETE SLAB AND FOOTING AND WOOD FRAMING.

REFER TO CIVIL DRAWINGS FOR LOCATION OF RANGE TOWER ON-SITE

WALL CONSTRUCTION SHALL BE AS FOLLWS:
2 x 6 WOOD STUDS @ 16" o.c. WITH R-19 BATT INSULATION. INTERIOR WALL FINISH SHALL BE 1/2" B-C GRADE PLYWOOD, PAINTED, CAULK ALL JOINTS. EXTERIOR WALL FINISH SHALL BE 19/32" THICK "PLYNIUM" PLYWOOD SIDING AS MANUFACTURED BY GEORGIA-PACIFIC, OR APPROVED EQUAL. CORNER BOARDS AND TRIM SHALL BE REDCEDAR IN SIZES SHOWN ON DRAWINGS. STAIR CONSTRUCTION SHALL BE PRESSURE-TREATED SYP. BUILDING EXTERIOR SHALL RECEIVE A TWO-COLOR PAINT FINISH OF ONE COAT PRIMER AND TWO COATS ACRYLIC LATEX HOUSE PAINT.

WINDOWS SHALL BE FIXED ALUMINUM WITH CLEAR INSULATING GLASS, MODEL NO #PAO - ALUMINUM PICTURE WINDOW AS MANUFACTURED BY MILGARD, OR APPROVED EQUAL.

STANDING SEAM METAL ROOF SHALL BE SAME AS "PAK" USED ON THE RANGE OPERATIONS BUILDING. ROOF DECK SHALL BE 5/8" PLYWOOD. ROOF INSULATION SHALL BE R-19 BATT INSULATION. CEILINGS SHALL BE PAINTED 1/2" PLYWOOD, CAULK ALL JOINTS.

SECOND FLOOR SHALL BE 3/4" T&G PLYWOOD - PAINTED WITH FLOOR-GRADE ENAMEL. FLOOR SHALL BE INSULATED WITH R-19 BATT INSULATION.

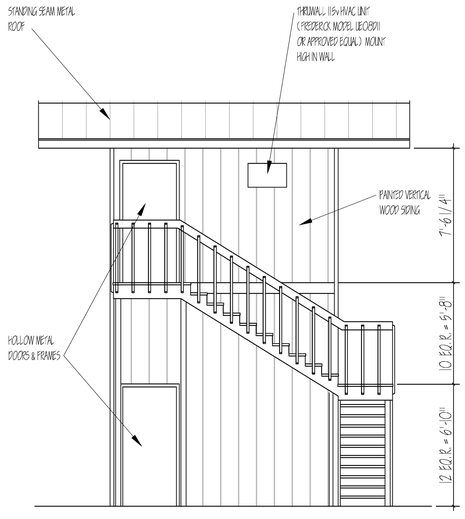


## NORTHEAST ELEVATION

SCALE: 1/4" = 1'-0"

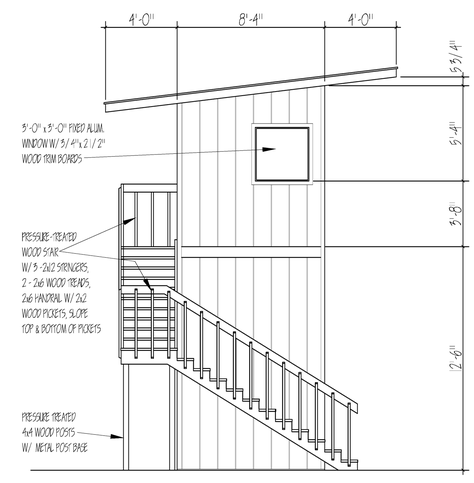


## NORTHWEST ELEVATION

SCALE: 1/4" = 1'-0"

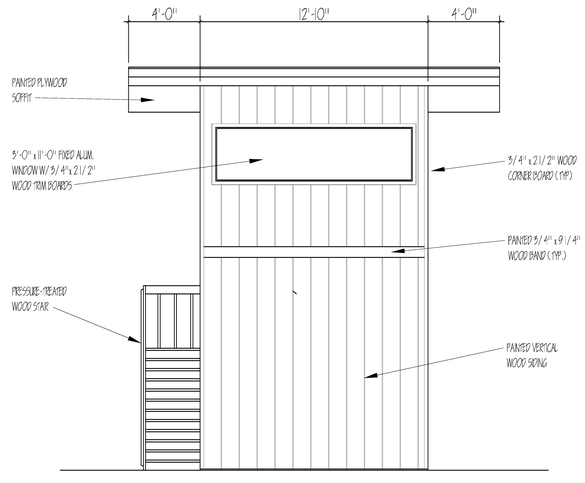


## SOUTHWEST ELEVATION

SCALE: 1/4" = 1'-0"

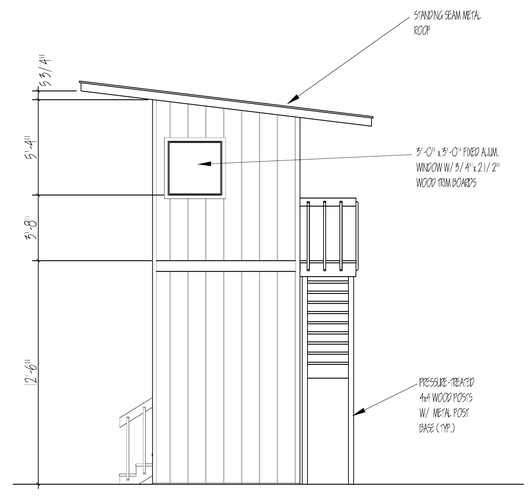


## SOUHTEAST ELEVATION

SCALE: 1/4" = 1'-0"

CLARK/DIXON
ARCHITECTS
2035 MADISON AVENUE | MEMPHIS, TN 38104
CLARKDIXONARCHITECTS.COM

# SHELBY COUNTY SHERIFF'S OFFICE
# RANGE OPERATIONS BUILDING

800 DOVECREST MEMPHIS, TENNESSEE

SEAL:

REVISIONS:

DATE:
AUGUST 28, 2012

DRAWN BY:
RLC

SHEET TITLE:

RANGE TOWER

SHEET NO:

**A-16**