

GENERAL NOTES (SHEET 4.1):

1. CONTRACTOR SHALL PROVIDE AND INSTALL (1) AMAG G4T-M2150-041 INTELLIGENT CONTROLLER AND THE ASSOCIATED PERIPHERALS TO ACCOMMODATE THE NEW KEYPAD/PROXIMITY CARD READERS.
2. CONTRACTOR SHALL PROVIDE AND INSTALL ALL ASSOCIATED PARTS AND LABOR NECESSARY TO INSTALL A COMPLETE AND FUNCTIONING SECURITY SYSTEM.
3. THE NEW SECURITY SYSTEM SHALL BE INTEGRATED WITH THE EXISTING SECURITY SYSTEM. CONTRACTOR SHALL PROVIDE ALL NECESSARY APPURTENANCES AND CONNECTIONS REQUIRED TO INTEGRATE SYSTEMS.

REFERENCE NOTES (SHEET 4.1):


1. CONTRACTOR SHALL PROVIDE AND INSTALL (1) MONITORING STATION FOR NEW CAMERA SYSTEM LOCATED AT THE RECEPTION DESK. CONTRACTOR SHALL PROVIDE ALL ACCESSORIES AND CONNECTIONS NECESSARY FOR MONITORING.

1 FLOOR PLAN - SECURITY - ELECTRICAL

SCALE: 1/8" = 1'-0"



Allen&Hoshall
engineering since 1915
1661 International Drive Memphis, TN 38120
901.820.0820 fax 901.683.1001
www.allenhoshall.com

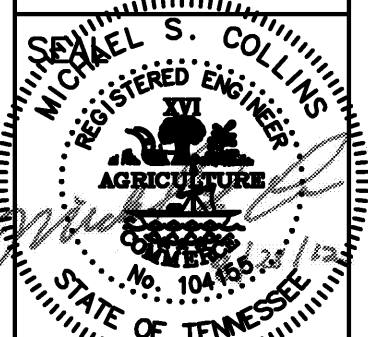

REVISIONS:

DATE:
AUGUST 28, 2012

DRAWN BY:
KES

SHEET TITLE:

FLOOR PLAN
SECURITY
ELECTRICAL

SHEET NO:

E4.1

SHELBY COUNTY SHERIFF'S OFFICE
RANGE OPERATIONS BUILDING
800 DOVECREST
MEMPHIS, TENNESSEE

CLARK/DIXON
ARCHITECTS
2035 MADISON AVENUE / MEMPHIS, TN 38104
clarkdixonarchitects.com