

SYMBOL LEGEND	
SYMBOL	DESCRIPTION
○	QUICK RESPONSE SEMI-RECESSED 85° F PENDENT SPRINKLER HEAD
□	LIGHT FIXTURE - SEE ELECTRICAL
◆	LIGHT FIXTURE - SEE ELECTRICAL
■	ELECTRIC CEILING HEATER - SEE HVAC
■	SUPPLY DIFFUSER - SEE HVAC
■	RETURN / EXHAUST REGISTER - SEE HVAC

GENERAL NOTE:
 SPRINKLER CONTRACTOR SHALL RELOCATE AND MODIFY EXISTING SPRINKLER SYSTEM WITHIN FOOTPRINT OF RENOVATION AS REQUIRED TO COORDINATE WITH NEW ARCH. CEILING GRID AND PROVIDE LIGHT HAZARD COVERAGE @100 GPM @2. FT. FOR MOST REMOTE @500 SQ. FT. IN FULL COMPLIANCE WITH NFPA 13, LOCAL AND STATE CODE REQUIREMENTS, OWNER AND OWNER'S INSURANCE CO.
 SPRINKLER CONTRACTOR SHALL COORDINATE NEW SPRINKLERS AND PIPING WITH ALL NEW AND EXISTING LIGHTS, DUCTWORK, PLUMBING PIPING AS WELL AS ALL BUILDING STRUCTURAL COMPONENTS.
 CONTR. TO PROVIDE QUICK RESPONSE TYPE SPRINKLERS.
 ALL NEW SPRINKLER PIPING SHALL MATCH EXISTING SPRINKLER PIPING MATERIAL.

FIRE PROTECTION NOTES


1. THESE DRAWINGS ARE DIAGRAMMATIC AND ARE FOR BIDDING PURPOSES ONLY. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO PREPARE DETAILED SHOP DRAWINGS AND CONFIRM SPACE ALLOCATIONS.
2. ALL SPRINKLERS IN CEILING TILES SHALL BE PLACED IN THE CENTER OF SUCH TILES WHERE POSSIBLE. COORDINATE EXACT LOCATION OF ALL SPRINKLERS WITH ARCHITECTURAL REFLECTED CEILING PLAN. CONTRACTOR SHALL SUBMIT A REFLECTED CEILING PLAN SHOWING ALL SPRINKLERS, LIGHT DIFFUSERS, ETC. TO ARCHITECT FOR APPROVAL PRIOR TO STARTING ANY WORK.
3. PROVIDE A WET TYPE SYSTEM FOR ENTIRE PROJECT. PROVIDE LIGHT HAZARD COVERAGE @100 GPM FOR MOST REMOTE @500 SQ. FT.
4. SYSTEM MATERIALS, DESIGN, AND INSTALLATION SHALL MET THE REQUIREMENTS OF NFPA 13, NFPA 24, LOCAL FIRE DEPARTMENT AND OWNER'S INSURANCE COMPANY.
5. PROVIDE UL CODE APPROVED SLEEVES FOR PENETRATIONS THRU ALL RATED WALLS.
6. SEE ARCHITECTURAL AND STRUCTURAL PLANS FOR ALL BUILDING DIMENSIONS, ELEVATIONS, DETAIL, ETC.
1. CEILING SPACE IS CRITICAL. CONTRACTOR SHALL COORDINATE WITH ALL TRADES. THE SPRINKLER CONTRACTOR SHALL RUN HIS PIPING IN SPACE NOT BEING USED BY OTHER TRADES.
8. CONTRACTOR SHALL PROVIDE SHOP DRAWINGS SHOWING ROOM NAMES, HANGERS MOUNTING DETAIL, AND SPRINKLER DETAIL.
9. PROVIDE SEISMIC BRACING AS REQUIRED BY NFPA 13. CONTRACTOR TO VERIFY NEED WITH FIRE DEPARTMENT, LOCAL AUTHORITY HAVING JURISDICTION AND OWNER'S INSURANCE COMPANY.

BCM
 BARHAM / CAIN / MYNATT
 INCORPORATED
 CONSULTING ENGINEERS
 1015 Cordova Station Road Cordova, Tennessee 39018
 Phone: (901) 685-2771 Fax: (901) 682-0233
 E-mail: barham@barhamcainmylatt.com



Revision	Description	Date

1 FLOOR PLAN - FIRE PROTECTION
 1/4" = 1'-0"
 13009-Firecladg

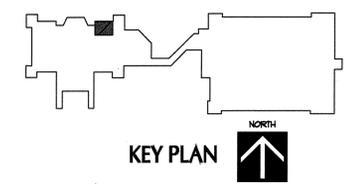

NEW COURTROOM LL188
SHELBY COUNTY JUSTICE CENTER
 201 POPLAR AVENUE
 MEMPHIS, TENNESSEE

Sheet Title
 FIRST FLOOR PLAN - FIRE PROTECTION
 Project No.
 13009
 Drawing File No.
 13009-fire
 Drawn by
 WBD
 Date
 04-16-2013
FP1.1
 Sheet No.