


PAVEMENT SCHEDULE

①	ASPHALTIC CONCRETE SURFACE (THICKNESS AS INDICATED) 411-01.01 ASPHALT CEMENT (PG64-22) (ACS) GRADING D
②	411-01.02 AGGREGATE (ACS) GRADING D
③	SOIL CEMENT (THICKNESS AS INDICATED) 304-01.02 CEMENT (SOIL CEMENT BASE)
④	PRIME COAT 402-01 BITUMINOUS MATERIAL FOR PRIME COAT (P.C.) @ 0.30-0.35 GAL/S.Y. 402-02 AGGREGATE FOR COVER MATERIAL (P.C.) @ 8-12 LBS/S.Y.

TEMPORARY BENCHMARK
TEMPORARY BENCHMARK (T.B.M.): TOP OF 6-72 INLET AS SHOWN HEREON.
ELEVATION 288.68

BENCHMARK
CITY OF MEMPHIS MONUMENT LOCATED AT THE SOUTHWEST CORNER OF MULLINS STATION ROAD AND STATE ROAD AT THE BACK OF THE CURB E.R. ON THE STATE ROAD SIDE.
ELEVATION 288.68

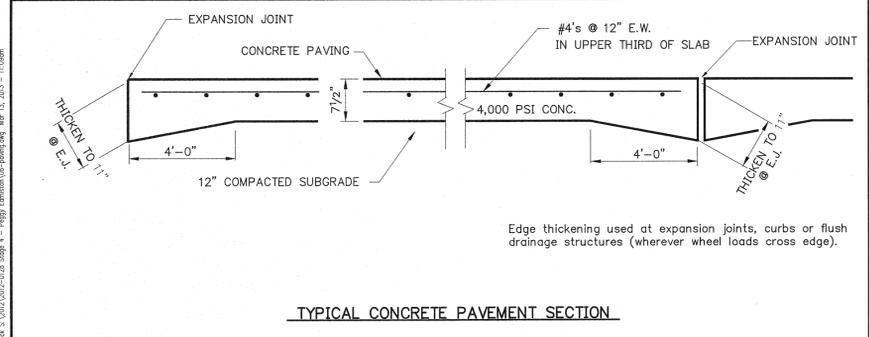

PHASE 1
ALL CONSTRUCTION WITHIN THE PHASE 1 LIMITS SHALL BE COMPLETE BEFORE REMAINING WORK BEGINS.

REVISIONS

ITEM No.	DESCRIPTION OF CHANGE	APPROVAL DATE
	CIP PROJECT No. 100102	



SRC CONSULTING, LLC
ENGINEERING - PLANNING
LANDSCAPE ARCHITECTURE
5909 Shelby Oaks Drive
Suite 200
Memphis TN 38134
901-373-0380
(fax) 373-0370
info@SRCE-memphis.com

DIVISION OF PUBLIC WORKS
PAVING PLAN
EAST PARKING LOT - PEGGY EDMISTON
SHELBY COUNTY, TN

SURVEY Milestone Land Surveying, Inc. DATE 4/03 BOOK
DRAFTED SR Consulting, LLC DATE 3/13 SCALE 1" = 30'
DESIGN SR Consulting, LLC DATE 3/13 PROJECT DATE

R04 5/10/13 10:02:02B Stage 4 - Peggy Edmiston/pep-pony.dwg Mar 13, 2013 - 11:09am